

Dynamic decors FOR ENDLESS INTERIOR DESIGNS

ARAUCO Melamina boards produced in Mexico have the quality and versatility for applications in any type of carpentry, interior design and architecture projects.

mx.arauco.com

- → GREAT VARIETY OF DECORS AND TEXTURES
- → BOARDS PROTECTED WITH VIRUS NANO PROTECH TECHNOLOGY
- **→** INDOOR USE PRODUCTS

MUITIDECOR SUPERFICIES DE INGENIERÍA

Cuadrante de San Francisco No. 14, Col. Cuadrante de San Fracisco Alcaldía: Coyoacán C.P. 04320, CDMX 55 5554-5858 / 55 5554-5859

DONDE COMPRAR





arauco

mx.arauco.com

araucoMELAMINA

FEATURES

- PBO, PBO MR and MDF board with decorative surface impregnated with melamine resin.
- · Homogeneous and durable surface.
- Ideal for furniture manufacturing and carpentry for indoor applications.
- Available in a wide range of colors, decors and textures that bring style for unique spaces.
- Copper Nanoparticles Protection that eliminates up to 99.9% of virus and bacteria in 60 minutes and is effective against the virus that causes COVID-19*.

MAIN APPLICATIONS

 Residential casework, fixture fabrication, and architecturally-specified interiors.
 It is suitable for vertical and low-impact horizontal applications.

RECOMMENDATIONS

- · Product for indoor use.
- To cut, use widia (tungsten carbide) cutting disk with a minimum of 60 teeth of the hollow or trapezoidal chest type.

- For better cutting results use the double sided melamine blade.
- To apply screws properly it is important to pre-drill.
- Protect the edges from moisture applying either PVC, ABS, melamine edge banding or moulding on all edges of the piece.
- For humid areas and environments, the use of Moisture Resistant PBO boards is recommended.

STORAGE

- Store the boards in horizontally, raised from the floor with supports spaced no more than 80 cm. If stored vertically, do it in a small number, securing the boards in their position.
- Store indoors in cool and dry places, not exposed to the sun.
- *The effectiveness studies were carried out on the Human Betacoronavirus OC43, which is considered to be from the same family and subfamily as SARS CoV-2.

TECHNICAL SPECIFICATIONS										
Product	Dimensions			Density	Tolerances					
	thicknesses mm	length m	width m	average kg/m³	thickness mm	length mm	width mm	diagonal mm		
ARAUCO Melamina PBO*	16 - 19	2.44	1.22	660 - 700	-/+0.2	-/+2	-/+2	-/+2		
	28	2.44	1.22	630 - 670	-/+0.2	-/+2	-/+2	-/+2		
ARAUCO Melamina PBO MR*	16 - 19	2.44	1.22	700 - 740	-/+0.2	-/+2	-/+2	-/+2		
	28	2.44	1.22	670 - 710	-/+0.2	-/+2	-/+2	-/+2		
	5.5	2.44	1.22	810 - 850	-/+0.2	-/+2	-/+2	-/+2		
ARAUCO Melamina MDF*	9	2.44	1.22	615 - 665	-/+0.2	-/+2	-/+2	-/+2		
	12 - 15 - 18 - 25	2.44	1.22	595 - 645	-/+0.2	-/+2	-/+2	-/+2		

*Note: Melamine boards in substrate PBO, PBO MR and 1-sided MDF non-slip design, tend to present a buckling by nature of the product. This is not considered a quality defect and is not treated as a claim. For more information consult your Sales Executive or Preferred Distributor.

ABRASION RESISTANCE					
Test results	Description				
Minimum 500 cycles single-colored boards	The test ends by completely wearing down the melamine paper and reaching the substrate.				
Minimum 150 cycle boards with design	The test ends when the printed design wears down and disappears in the upper relief of the board texture.				

Note: Results obtained from tests under the UNE 7265 Standard, performed with a Taber® Abraser.

PHYSICAL-MECHANICAL PROPERTIES										
Property		Unit	Substrate thicknesses							
			PBC)	PBO MR		MDF			
			16 - 19 mm	28 mm	16 - 19 mm	28 mm	5.5 mm	9 mm	12 - 15 - 18 - 25 mm	
Tensile strength		N/mm²	0.35	0.30	0.48	0.35	1.00	0.80	0.70	
Flexural strength		N/mm²	11	9	12	10	30	29	27 - 28	
Screw retention	(Face)	N	700	700	800	700	N/A	N/A	1,100	
	(Side)	N	800	800	900	800	N/A	N/A	850	

Measurements and technical characteristics may be modified without prior notice.






First Melamine Laminate Board (TFL) made in Mexico with Virus Nano Protech Protection and Antiviral & Antibacterial certificate.

ACCESSORIES

 Edge banding: All ARAUCO Melamina decors have a edge banding match with variety of vendors. For more information visit: mx.arauco.com

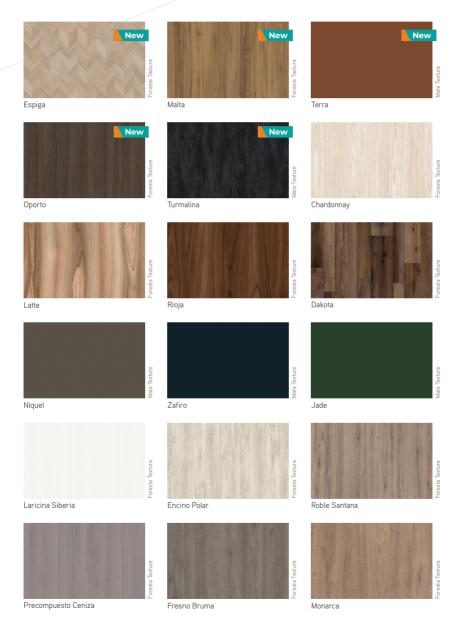

Measurements and technical characteristics may be modified without prior notice.

mx.arauco.com

GTGUCOMELAMINA





Nebraska



Nogal Neo



Nogal Británico



Durango



Wengué



Anáhuac



Ébano Indi



Cerezo





Metropolitan





Blanco Frosty



Gris Claro



Gris







Visón



Nota: Products available upon request with TSCA emissions and FSC certification.



Measurements and technical characteristics may be modified without prior notice.